

# SUKSES MAKMUR INTERNATIONAL OUR PRODUCT

## 1. FILTER PAPER (AHLSTROM)

**AHLSTROM**




## 2. TEA BAG PACKAGING MACHINE (TECNAMECCANICA)



### a. Single Chamber

#### ➤ T2 Prima

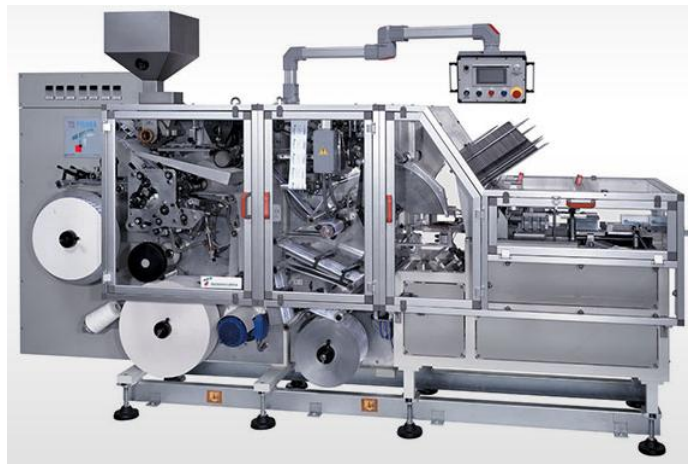

Technical data:

- Output : 320 bags/ment
- Maximum Dosage : 6 cm<sup>3</sup> with bag size 50 x 56 mm  
19.6 cm<sup>3</sup> with bag size 75 x 85
- Absorbtion : 8 kW (with 3 side seal envelope and single cartoning unit)
- Power Supply : 3 x 400 + PE (other type available upon request)
- Max consumption of compressed air : 6.5 bar – 700 NI/min ; with 3 side seal envelope and single row cartoning unit

## FLEXIBILITY OF CHOICE

1. T2 teabag, with no envelope, and counting/stacking unit, for manual cartoning



2. T2 teabag, with no envelope, and single-row carton



3. T2 teabag, with no envelope, and multi-row carton



4. T2 teabag, 3 side-seal envelope, and single-row carton



5. T2 teabag, 4 side-seal envelope, and single-row carton



6. T2 teabag, 3 side-seal envelope, and multi-row carton



7. T2 teabag, 4 side-seal envelope, and multi-row carton



➤ **T2 Prima – Full Leaf**



Technical Specification :

- Up to 180 teabags/min
- Power Supply : 400 V, 3 Phase, 50/60 Hz
- Max. Compressed air consumption : 6.5 bar – 700 NI/ min
- Numb. Of load cell weigher heads : 14
- Weighing speed : up to 2 x 100 times / min (subject to product properties)
- Hopper flap actuation : two stepper motors

## b. Double Chamber

### ➤ T10 CONTINUA



#### Technical Specifications:

- Up To 500 bags / min
- Max. Filling Volume Per Bags : Up To 9.5 cm<sup>3</sup>
- Required Power :
  - Maximum Demand : 21 kW
  - Max. Power Consumption : 15 kW
- Standart Suplly Voltage : 3P – 400 Vac – 25 A (other on request)
- Compressed Air : 6.5 bar – 640 NI/min

### ➤ T4



- Speed : 250 bags/min
- Standart Size : 40 x 60 mm

### 3. ALUWIRE (ELISENTAL)

**ELISENTAL**



### 4. CARTON MAKER (KLIKLOK)



----OUR PRODUCT----